
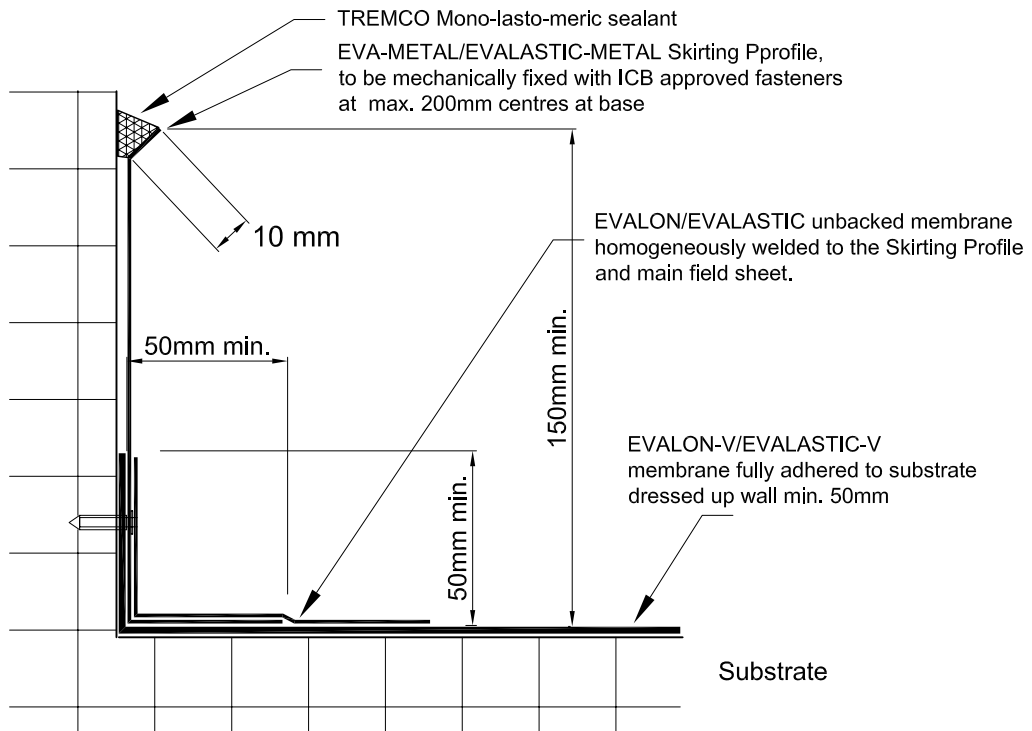


Rev. No.	Revision Note	Date	Signature	Checked
1	Conservation to Fuel & Power- SPRA recommendations	24-05-04	RCT	

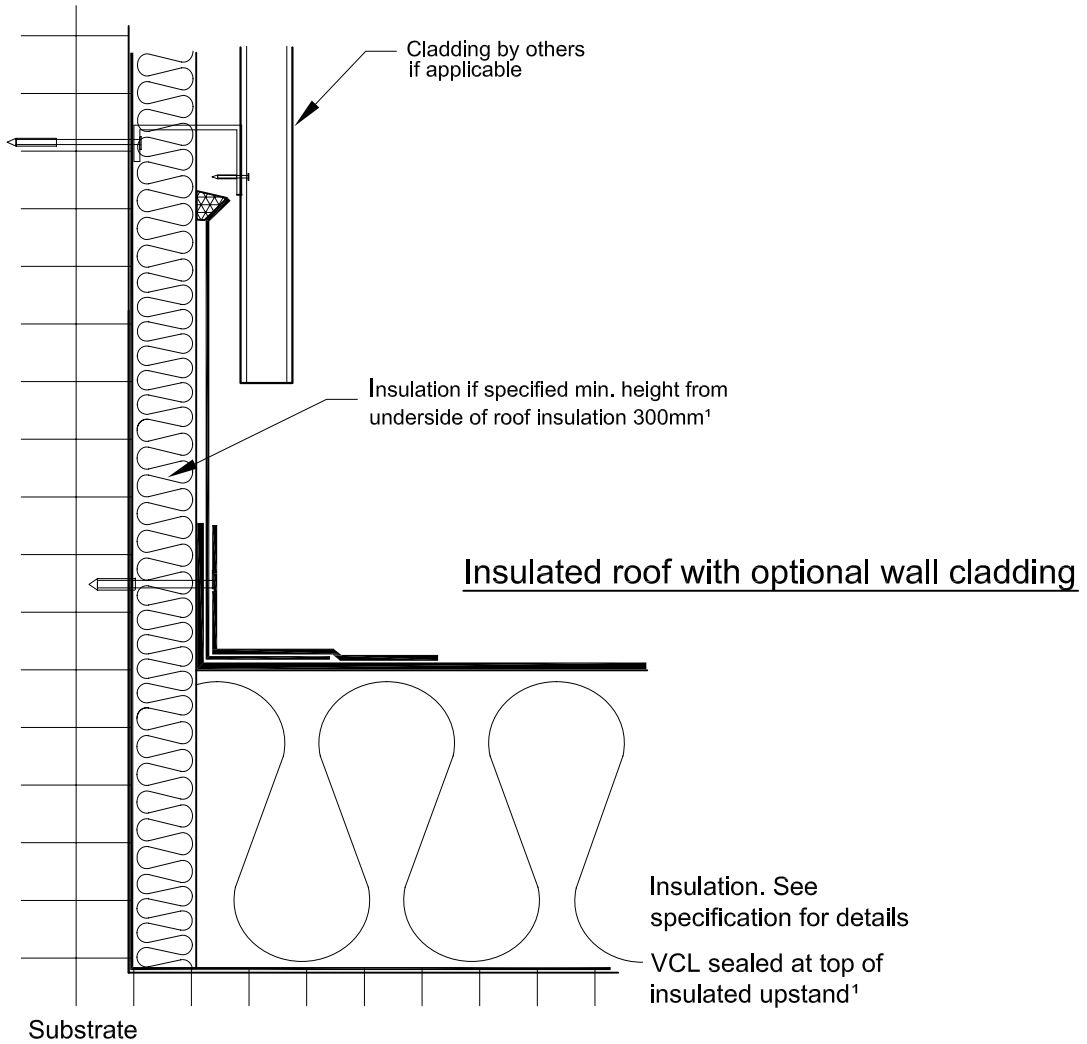

Notes:- All Surfaces must be prepared as per ICB Ltd's Written Instructions, and in accordance with the Project Specification.

All Adhesives must be used as per the Manufacturers' Instructions.

¹ To avoid thermal bridging the wall must be insulated to achieve a min. thermal resistance ('R' value) = 0.75m²K/W. This can be achieved by use of insulation as shown above or by other methods (eg. thermal insulation blocks)¹

Owner



Title/Name

Typical Skirting Detail using Standard Skirting Profile

Drawing Number

3.1

Drawn By

RCT

Date

01-11-03

Scale

nts